

# Modular SKVMs

Modular SKVM																
Part Number	F1DN102 MOD-PP-4 (Display Port)	F1DN202 MOD-PP-4 (Display Port)	F1DN104 MOD-PP-4 (Display Port)	F1DN204 MOD-PP-4 (Display Port)	F1DN102 MOD-DD-4 (DVI)	F1DN202 MOD-DD-4 (DVI)	F1DN104 MOD-DD-4 (DVI)	F1DN204 MOD-HH-4 (DVI)	F1DN102 MOD-HH-4 (HDMI)	F1DN202 MOD-HH-4 (HDMI)	F1DN104 MOD-HH-4 (HDMI)	F1DN204 MOD-HH-4 (HDMI)	F1DN102 MOD-HH-4 (BASE)	F1DN202 MOD-BA-4 (BASE)	F1DN104 MOD-BA-4 (BASE)	F1DN204 MOD-BA-4 (BASE)
No. of Computers	2	2	4	4	2	2	4	4	2	2	4	4	2	2	4	4
No. of Displays	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
CONSOLE PORTS (DEVICES)																
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port for keyboard) with status indicator lights															
Console Remote Control Port	USB Mini (female)															
Console Video Port	DisplayPort								DVI				HDMI			
Integrated Console Cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	Optional cables to provide DP, DVI, HDMI, mDP, VGA			
Max Resolution Supported	3840 x 2160 pixels (UHD 4K) @ 30Hz - 2560 x 1600 pixels @ 30Hz															
COMPUTER PORTS																
Computer Keyboard/Mouse Port	USB Type A															
Computer Video Port	DisplayPort								DVI				HDMI			
Integrated Computer Cable	2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		Optional cables to provide DP, DVI, HDMI, mDP, VGA, USB-C w/USB to support keyboard, video, and mouse			
PHYSICAL																
Dimensions	3.5 (W) x 7.5 (D) x .6 (H) in. / 90 (W) x 190 (D) x 15 (H) mm (unit w/out cables)															
Weight	.55 lbs (0.25 kg) (unit w/out cables)															
POWER																
Power Requirements	12V, 2.5A DC															
AC Input	100-240VAC															
Power Type	External with WW mains connectors															
ENVIRONMENTAL																
Operating Temperature	32° to 104° F (0° to 40° C)															
Storage Temperature	-4° to 140° F (-20° to 60° C)															
Humidity Storage and Use	0-80% RH, non-condensing															
CERTIFICATION																
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/Display v 1.0 TEMPEST variants available via an SDIP-55 NATO accredited TEMPEST test facility															
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA															
GENERAL INFORMATION																
Made in	Designed in California. Assembled in USA with USA-based technical support (TAA compliant)															
Product Life-Cycle	5 years															
Warranty	3 years standard (upgradeable to 4 or 5 years)															
Enclosure	Diecast aluminum															

# Modular KMs

Modular SKM		
Part Number	F1DN002MOD-KM-4	F1DN004MOD-KM-4
No. of Computers	2	4
No. of Displays	Up to 8	
CONSOLE PORTS (DEVICES)		
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port) for keyboard with status indicator lights	
Console Remote Control Port	USB Mini (female)	
Console Video Port	None	
Max Resolution Supported	N/A	
COMPUTER PORTS		
Computer Keyboard/Mouse Port	USB Type A	
Computer Video Port	None	
Integrated Computer Cable	2x 6 ft. (1.8m) integrated cables for USB	4x 6 ft. (1.8m) integrated cables for USB
PHYSICAL		
Dimensions	3.5 (W) x 7.5 (D) x .6 (H) in. / 90 (W) x 190 (D) x 15 (H) mm (unit wo/cables)	
Weight	.55 lbs (0.25 kg) (unit wo/cables)	
POWER		
Power Requirements	12V, 2.5A DC	
AC Input	100-240VAC	
Power Type	External with WW mains connectors	
ENVIRONMENTAL		
Operating Temperature	32° to 104° F (0° to 40° C)	
Storage Temperature	-4° to 140° F (-20° to 60° C)	
Humidity Storage and Use	0-80% RH, non-condensing	
CERTIFICATION		
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Keyboard/Mouse v 1.0. TEMPEST variants available via an SDIP-55 NATO accredited TEMPEST test facility.	
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA	
GENERAL INFORMATION		
Made in	Designed in California. Assembled in USA with USA-based technical support (TAA compliant).	
Product Life-Cycle	5 years	
Warranty	3 years standard (upgradeable to 4 or 5 years)	
Enclosure	Diecast aluminum	

# Accessories Modular SKVM

Modular SKVM Accessories			
F1DN-MOD-VMOUNT	F1DN-MOD-MOUNT	F1DN1MOD-EXT-04	F1DN2MOD-EXT-04
Belkin Modular KVM/KM VESA Mount	Belkin Modular KVM/KM Under-Desk Mount	Belkin Modular Single-Head Host or Console Extension Cable, 4 ft.	Belkin Modular Dual-Head Host or Console Extension Cable, 4 ft.
F1DN-MOD-CEXTCS	F1DN-MOD-HEXRC5	F1DN-MOD-CEXTFI	F1DN-MOD-HEXRFI
Belkin Modular KVM Console Side CAT5 Extender	Belkin Modular KVM Host Side CAT5 Extender	Belkin Modular KVM Console Side Fiber Extender	Belkin Modular KVM Host Side Fiber Extender

Modular SKVM Replacement Parts		
0401-00811	F1DN-MOD-REM2	F1DN-MOD-REM4
Belkin Modular KVM/KM Power Adapter 12V 2.5A, w/Interchangeable Mains Connector Wall Mount	Belkin Modular KVM/KM Replacement Remote Control, 2 Port	Belkin Modular KVM/KM Replacement Remote Control, 4 Port

# Accessories Modular KMs

Modular SKM Accessories	
F1DN-MOD-VMOUNT	F1DN-MOD-MOUNT
Belkin Modular KVM/KM VESA Mount	Belkin Modular KVM/KM Under Desk Mount

Modular SKVM Replacement Parts			
0401-00811	F1DN-MOD-REM2	F1DN-MOD-REM4	F1DN1MOD-USB-06
Belkin Modular KVM/KM Power Adapter 12V 2.5A, w/Interchangeable Mains Connector Wall Mount	Belkin Modular KVM/KM Replacement Remote Control, 2 Port	Belkin Modular KVM/KM Replacement Remote Control, 4 Port	Belkin Modular USB Cable for KM, 6 ft.

## Modular SKVMs

Belkin's Modular SKVMs are designed and built for government and military agencies around the world to safeguard critical data and computer systems. While only slightly larger than a modern smartphone, Belkin's Modular series of secure KVMs and KM's meet all critical security constructs to ensure air-gap isolation and system security in the smallest form factor on the market. Universal video compatibility, innovative mounting options, and an included remote control allow administrators to declutter the operator's desk without jeopardizing control and access.




- Smallest form factor for 2- or 4-port secure KVM
- Universal video compatibility
- Included remote control supports KVM switching while decluttering the desk
- Optional mounting hardware supports VESA and under-the-desk mounting
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards
- TAA compliant, assembled in the USA
- Dedicated US-based free technical support

### Free up your desk

With a 94% smaller footprint than other KVMs, the Modular SKVM Series is designed to take up as little desk space as possible while adhering to NIAP PP PSD 4.0 requirements.

Optional mounting choices and the included remote control combine to help declutter the desk while enhancing operator ergonomics in even the most cramped work environments.

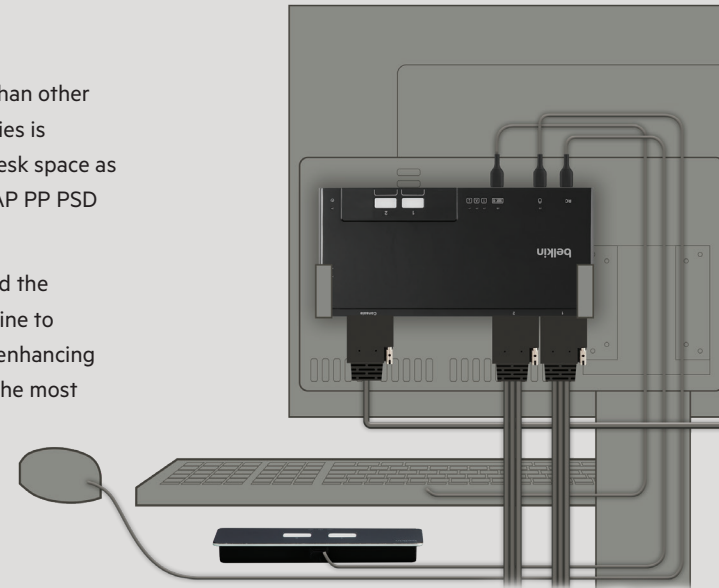

2-Port, Single-Head Modular Secure KVM Switch w/Remote  
F1DN102MOD-BA-4



2-Port, Dual-Head Modular Secure KVM Switch w/Remote  
F1DN202MOD-BA-4



4-Port, Single-Head Modular Secure KVM Switch w/Remote  
F1DN104MOD-BA-4



4-Port, Dual-Head Modular Secure KVM Switch w/Remote  
F1DN204MOD-BA-4

## Modular SKVMs Modular KMs



## Modular KMs

Supporting two or four computers, the Belkin Secure Modular KM series is ideal for desktops that require multiple monitors for real-time monitoring and response. Each computer remains directly connected to its own monitor(s) while the KM switches USB keyboard and mouse control with a simple keyboard key press and cursor move to the active computer. Modular KM units are shipped with a complete set of connecting cables and a remote-control unit, should a user desire a button push to switch the keyboard and mouse to a different computer.

- Smallest form factor for 2- or 4-port KM
- Included remote control supports KM control switching while decluttering the desk
- Optional mounting hardware supports VESA mounting and under-the-desk mounting
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards
- TAA compliant, assembled in the USA
- Dedicated, USA-based free technical support

**Belkin International, Inc.**  
12045 E. Waterfront Drive,  
Playa Vista, CA 90094  
(310) 751-5569  
belkin.com/cybersecurity

LinkedIn:



**SUPPORT**  
Secure KVM Support 800-282-2355

**SALES**  
FederalBusinessDivision@belkin.com

Brochure to download:

